


"TP19_IP54" SERIES

Description: **Roof Exhaust Unit IP54**





- Type of material:** ABS/PC alloy and aluminium
- Standard colour:** RAL 7035 - other colours on request
- Protection degree:** IP54, according to EN 60529 standard
- Fixing method:** By No 8 Ø4x16 mm screws for thermoplastic material
- Plate thickness:** any
- Storage temperature:** from -20°C to +60°C
- Motor Lifetime L10 at 25°C**
80%RH (approx.): 115V 75,000h 50Hz; 80,000h 60Hz
 230V 59,000h 50Hz; 73,000h 60Hz
- Working class of capacitor:** class B
- Motor protection:** thermal
- Electrical connection:** by terminal block 3 poles L-N-PE
- Earth connection:** (by terminal block, PE pole)
- Appliance class:** class I
- Approvals:** CE
- Filtering class:** class G2 more metallic net according to EN 779
- Degree of separation:** 67% - DIN 24185 (without net)
- Dust retention capacity:** 380 g/m²
- Note:** filter media is washable about 10 times
- Weight:** 2.1 Kg

Technical drawing

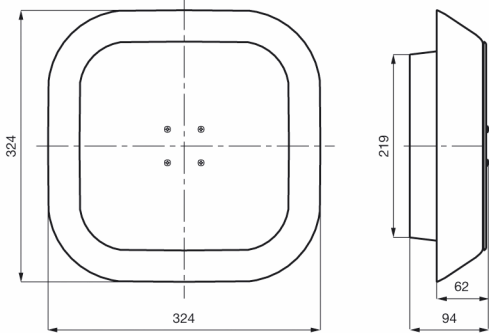

Mounting cut-out

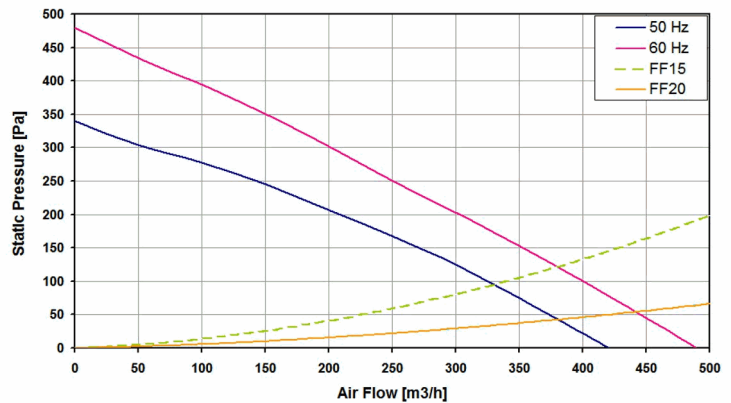

Model	Voltage (V)	Frequency (Hz)	Rated Current (A)	Rated Power (W)	Max Air Flow** (m ³ /h)	Static Pressure (Pa)	Fan Noise [db(A)]	Rated Temp. Range (°C)	Approvals
TP19U115B54	115 V a.c.	50/60	0.62/0.64	66/74	420/490	340/480	67.9/71.0	-10 - +60	CE
TP19U230B54	230 V a.c.	50/60	0.309/0.360	70/83	420/490	340/480	67.9/71.0	-10 - +60	CE

data with uncertainty of 10%

All specifications, data and drawing are subject to change without notice and are approximate.